

RoHS

| REV | ECN NO. | DESCRIPTION | DESIGN | APPROVAL | DATE |
|-----|---------|-------------|--------|----------|------------|
| A1 | NEW | 更换图框 | | | 2023.11.25 |




Product Characteristics

| Blocks and Clips for Blade Fuses | |
|----------------------------------|--|
| Compatible Fuses | Automotive Blade Fuses |
| Electrical Specifications | Rated Voltage: 500 V |
| | Rated Current: From 15 to 30 A |
| Molded Parts | Insulation Block: Black Thermoplastic PET (UL94 V-0) and PA66 (UL94 V-0) |
| Metal Parts | PCB Terminals: Tin Plated Cu Alloy |
| Electrical | Insulation Resistance: 10,000 Megaohm Minimum at 500 VDC |
| | Contact Resistance: ≤ 5 mΩ Maximum |
| Ambient Temperature | -40 °C to 125 °C |


Ordering Code:

XF-508PVS-B-B
1 2 3

1. 序列号
2. 保险丝类型: A=大号
B=小号
3. 颜色码: B=黑色 (默认为空)
Y=黄色
R=红色
W=白色
O=橙色

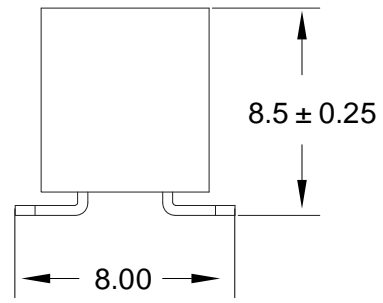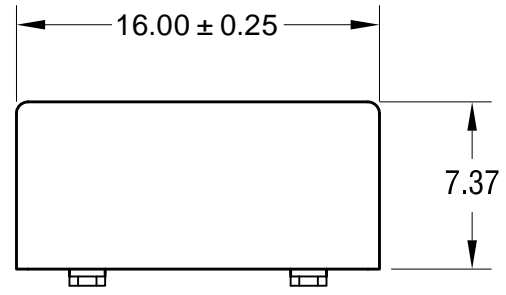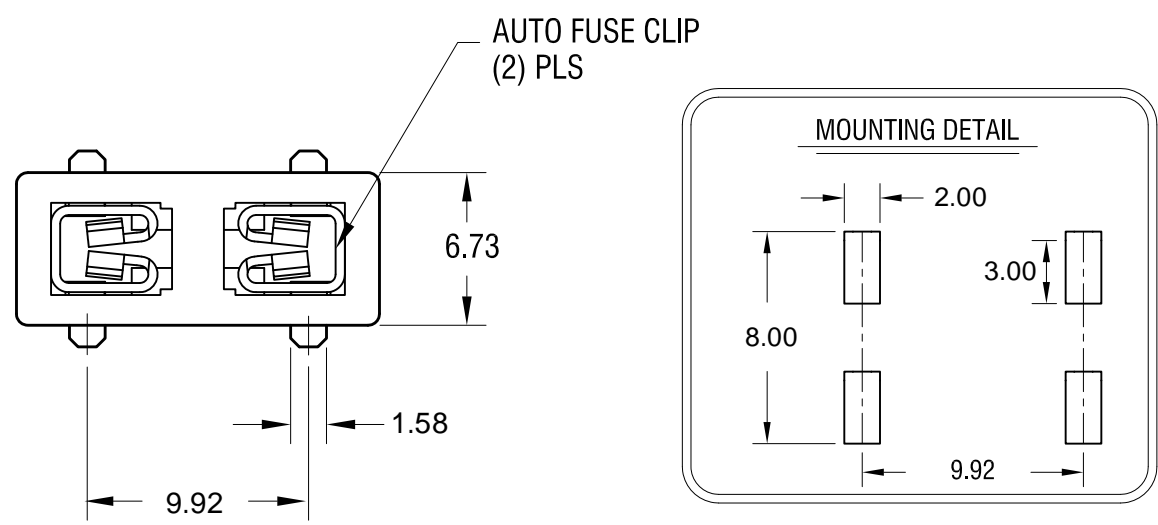

ACTUAL SIZE



| | | | | | |
|--|--------|-----------------------------------|-------------------|-------|-----|
| X.±0.50 | x.°± | PART NO: XF-508PVS-B-B | XFCN 兴飞连接器 | | |
| .X±0.25 | .X°± | | | | |
| .XX±0.15 | .xx°± | | | | |
| .XXX±0.10 | .xxx°± | | | | |
| UNITS: | mm | | | | |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN | | TITLE: AUTO BLADE FUSE HOLDERS | 0769-82001899 | | |
| | | APPD | www.xfconn.com | | |
| | | CHKD | DWG NO: / | | |
| | | DRAW | VIEW | | |
| | | DATE | SCALE | SHEET | REV |
| | | | 1:1 | 1 | A1 |
| | | | NONE | | |