

RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.04.17


TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PA6/66
 FLAMMABILITY RATING: UL94V0
 COLOR: GREEN
 CONTACT / PLATING: COPPER ALLOY / Ni+Sn






ENVIRONMENTAL
 OPERATING TEMPERATURE: -30°C UP TO +120°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	UL	VDE
CURRENT RATING:	15A	6.3A
WORKING VOLTAGE:	250VAC	250VAC
WITHSTANDING VOLTAGE:	1.5KV	1.5KV
RATED POWER ACCEPTANCE:	---	1.6W
PROTECTION CLASS:	I o II	
CONTACT RESISTANCE:	5/10 mΩ MAX	

MECHANICAL
 FUSE-LINK: 5x20 mm
 PROTECTION RATE: IP00
 SHOCKSAFE CATEGORY: PC1

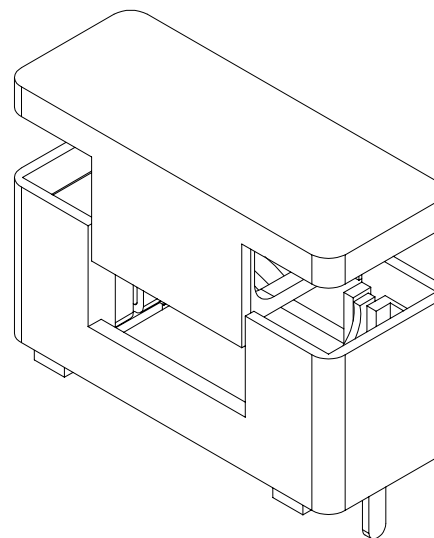

3D REFER TO

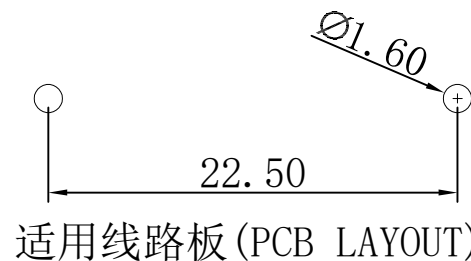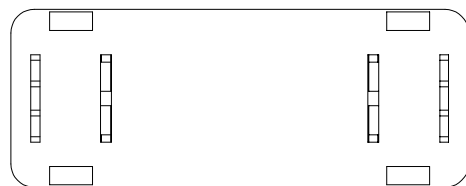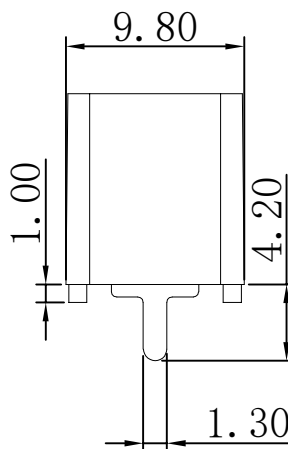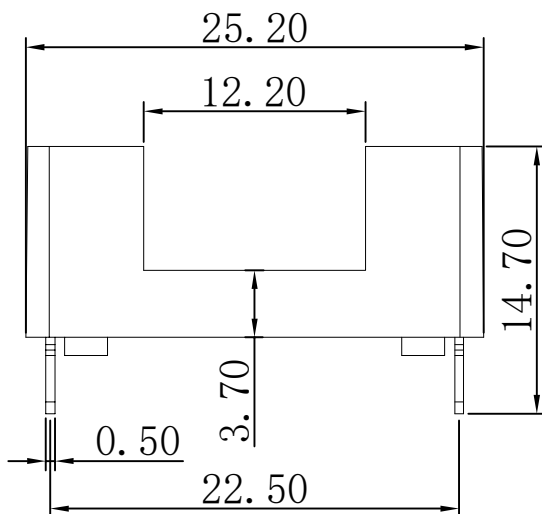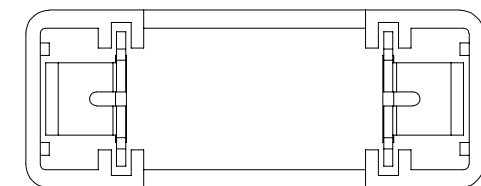

X.±0.50	X.°±	PART NO: PTF-77	XFCN 兴飞连接器					
.X±0.25	.X°±							
.XX±0.15	.XX°±					TITLE: 保险丝座 5x20mm 绿色 带盖	0769-82001899	
.XXX±0.10	.XXX°±					www.xfconn.com		
UNITS:	mm					DWG NO: /		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	VIEW					
		CHKD				SCALE	SHEET	REV
		DRAW				Wang	NO	A1
		DATE				2024.04.25	NONE	